

## Arm Cortex-A9 1.4 GHz IIoT gateway with built-in 4G LTE

- Armv7 Quad-core Cortex-A9 1.4 GHz CPU, 512MB or 1GB RAM + 8GB eMMC Hardware platform
- Elastel Optimized Ubuntu 20.04 Firmware flexible configure and program
- Dual auto-sensing 10/100 Mbps Ethernet ports
- 1x Mini-PCIe slot for cellular module or Wi-Fi module
- 4x Isolated RS485 and RS232 for industrial data acquisition
- SD slot for storage expansion
- 35mm DIN-Rail and wall mount Supported
- Fanless design with full heatsink enclosure
- -40°C to +85°C Operating Temperature for harsh environment




### Introduction

The Elastel EG324 IoT Gateway provide a high-performance computing platform for embedded data acquisition and communication applications. It comes with 4 x RS485/232 serial ports and dual 10/100 Mbps Ethernet ports, as well as a Mini-PCIe socket to support 4G LTE/3G/2G/NB-IoT/Cat M1 cellular modules and Wi-Fi modules. These versatile capabilities let users efficiently adapt the EG324 to a variety of complex communications solutions.




The EG324 is built around an up to 1.4GHz processor with 512MB or 1GB RAM and 8GB eMMC, this computing capability is widely applicable to a variety of industrial solutions.

With full industrial-grade design, guarantee this compact embedded computer reliably working on wide temperature, electromagnetic, lightning surge...harsh environment.



Leverage the Ubuntu OS power and flexibility, Elastel talented customers has configured and customized EG324 for their specific applications for data acquisition and processing at field sites as well as a useful communications platform for many other large-scale deployments.

## Appearance

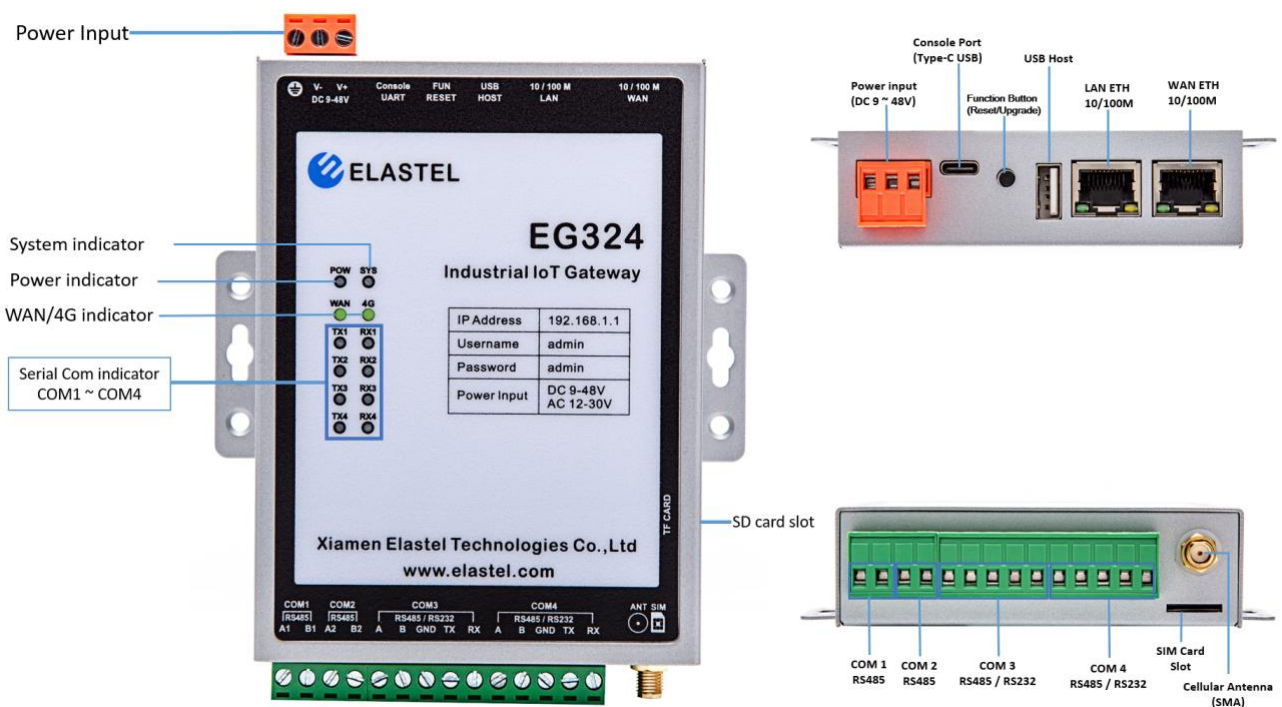

## Specifications

<b>System</b>	
CPU	Armv7 Quad-core Cortex-A9 1.4 GHz
Pre-installed OS	Optimized Ubuntu core 20.04, easy Configurable and Programmable
DRAM	512MB, 1GB DDR3
Storage Pre-installed	8 GB eMMC
Storage Slot	SD slots x 1
<b>Serial Interface</b>	
Serial Ports	2 x RS485 + 2 x RS-232/485
Baudrate	300 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Parity	None, Even, Odd, Space, Mark
Stop Bits	1, 1.5, 2
Protection	Surge 4KV ESD ±15kV IEC61000-4-2 Air Discharge ESD ±15kV Human Body Model
<b>Ethernet Interface</b>	
Ethernet Ports	2 x Auto-sensing 10/100 Mbps ports (RJ45 connector) , 1x WAN, 1xLAN or 2xLAN configurable
Protection	Surge 2KV ESD ±15kV IEC61000-4-2 Air Discharge ESD ±15kV Human Body Model
<b>Cellular Interface</b>	
Cellular module Slots	1 x mPCIe slot for Cellular or Wi-Fi module
Number of SIMs	1
SIM Format	Micro SIM (12mm*15mm)
Cellular Antenna Connector	SMA Female
<b>USB Host</b>	
USB 2.0	1 x USB 2.0, type-A connector
Power output	5V@500mA
Protection	Output Over Load protection ESD ±8kV IEC61000-4-2 Air Discharge ESD ±6kV Human Body Model
<b>Other Interface</b>	
Console Port	1 x UART type-C connector
Buttons	1x button for Reset and Upgrade
<b>Power Parameters</b>	
Standard Power	DC 12V/1.5A
Input Voltage	9 ~ 48 VDC, 12 ~ 30 VAC
Power Consumption	Working Mode: 6 W Max Consumption: <10 W

Protection	Overvoltage & Reverse polarity protection Surge 4KV ESD ±15kV IEC61000-4-2 Air Discharge ESD ±15kV Human Body Model
<b>Indicators</b>	
LED Indicators	Power x 1, System (programmable) x1, Cellular WAN x1, WAN x1, COM<x> trans x 8 (TX + RX)
Cellular LED status	Searching network: Slow flashing (200ms ON/1800ms OFF) Idle Status: Slow flashing (1800ms ON/200ms OFF) Transmission: Fast flashing (125ms ON/125ms OFF)
Buzzer	Built-in buzzer x 1, for Warning alarm ( Programmable)
<b>Reliability</b>	
Alert Tools	RTC (real-time clock) inside
Automatic Reboot Trigger	WDT (watchdog timer) inside
<b>Physical Characteristics</b>	
Dimensions	128.8mm×117mm×28mm (L×W×H)
Housing	Metal
Installation	DIN-rail mounting Wall mounting
Weight	470 g (1.04 lb)
<b>Environmental Limits</b>	
Ambient Relative Humidity	5 to 95% (non-condensing)
Operating Temperature	-40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
<b>Package Contents</b>	
Device	1 x EG324 IoT Gateway with Terminal Block preinstalled
Antenna	Mag-mount Cellular Antenna (SMA Male, 1 meter, 12dBi)
Installation Kit	1 x DIN-rail kit
<b>Software Features</b>	
Operating System	Optimized Ubuntu 20.04
Prebuilt Environment	Node-Red, Python, C/C++, Docker
Prebuilt OT-to-IT protocols	Modbus RTU / ASCII / TCP, M-Bus, EtherNet/IP, PROFINET, BACnet MSTP, PLCs data acquisition (Siemens S7, Allen-Bradley, Mitsubishi, OMRON...) Modbus TCP, MQTT, HTTP, TCP, UDP, OPC-UA, BACnet IP
<b>Others</b>	
Warranty Period	1 years
Certificates	CE, FCC, NBTC



### About Elastel

Elastel Technology Ltd is a global leading design and manufacturing company providing industrial-quality wireless solution for IoT and M2M. Founded in 2018, Elastel leverages its independent research and development and innovation to pursue its core mission: “Streamline IoT communication development, shorten and simplify the process of system implementation”

The company’s high-quality industrial Computer & Gateway hardware and software service enhance the IoT communication efficiency and competitive advantages of its customers all over the world.

### Copyright

Copyright © 2024 ELASTEL (XIAMEN) TECHNOLOGIES CO., LTD.

Copyright © 2024 Elastel (Xiamen) Technologies CO., LTD. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Elastel (Xiamen) Technologies CO., LTD.

### Technical Support

Send email to Elastel Support center ([support@elastel.com](mailto:support@elastel.com)) for firmware upgrade, product documents, FAQ, technical support and more.